




Rotaloc International, LLC

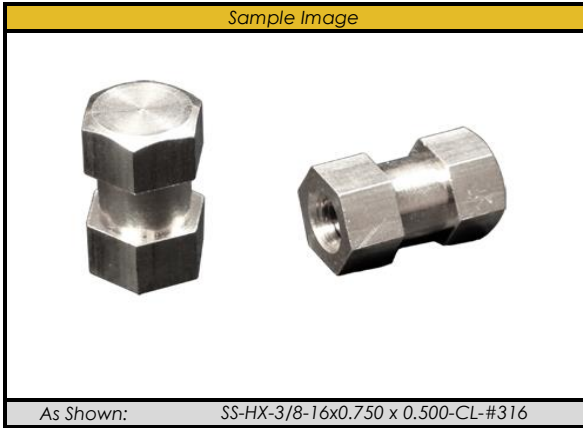

Common Insert Sizes


Thread Size (Inch)	OAL	AF
#8-32	0.500"	0.375"
#10-24	0.750"	0.375"
#10-32	0.375"	0.375"
1/4-20	0.650"	0.375"
1/4-20	0.720"	0.500"
5/16-18	0.750"	0.500"
3/8-16	0.750"	0.500"
1/2-13	0.875"	0.750"

Thread Size (Metric)	OAL	AF
M5x0.80	12.7mm	9.5mm
M6x1.00	15mm	10mm
M8x1.25	20mm	14mm
M10x1.50	25mm	19mm



Contact Rotaloc for additional sizes

Sizing Key & Product Description									
Material Options	Plating Options	Sizing							
AL - Aluminum	Trivalent Zinc (TZP)	Thd	OAL	AF	TL	H1	H2	Gh	Gd
BR - Brass	Nano Plating	Thread Size	Overall Length	Across Flat Dimension	Thread Length	Hex Height Top	Hex Height Bottom	Groove Height	Groove Diameter
SS - Stainless Steel	E-Coat								
ST - Zinc Plated Steel	Other finishes available								

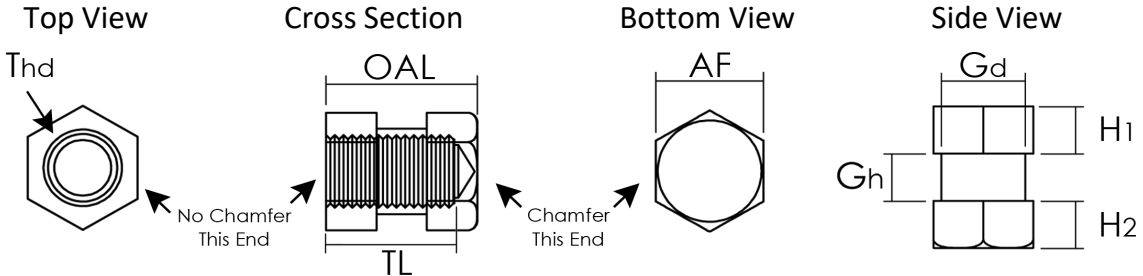

Contact Rotaloc for Prices and Sizing.



All plating and materials offered are RoHS and REACH Compliant

Many common sizes in stock. Contact Rotaloc® for availability.
A Rotaloc® Representative will be happy to discuss your specific application and product specifications.

<p style="text-align: center;">Contact Us:</p> <p>Tel (303) 948-5434 or Toll Free (888) Rotaloc or (888)-768-2562 www.rotaloc.com info@rotaloc.com</p>	<p style="text-align: center;">Address</p> <p style="text-align: center;">Rotaloc International, LLC 9903 Titan Court, Suite #15, Littleton, CO 80125 - USA</p>
---	---

Value - Quality - Service

Rotaloc® is a Registered Trademark of Rotaloc International, LLC - Copyright © 2012